


XD2A... / XD2C... SOLENOID OPERATING PROPORTIONAL VALVES CETOP 2

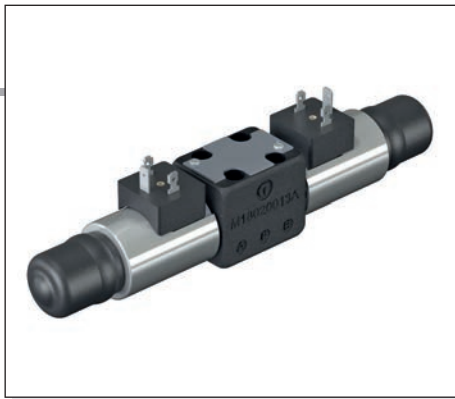


XD2A../XD2C.. series valves are used for controlling fluid direction and flow rate as a function of the supply current to the proportional control solenoid.

Any valve Δp variation causes a change in the set flow rate; however the valve itself ensures a high level internal compensation maintaining constant a regulated flow.

The XD2 cetop valve could be used for accurate proportional controls with compact size, reducing weight.

These valves can be also combined with Mini Powerpacks type MR/MC/FP creating compact solutions. It can be also used on a Cetop 3 interface using a reduction plate type BS32001.

XD2...	
STANDARD CONNECTORS	CAP. I • 20
REMSRA...	CAP. IX • 4
REMDRA...	CAP. IX • 7
CEPS	CAP. IX • 2
AM3H...	CAP. VIII • 12
BS32001	CAP. VII • 3



ORDERING CODE

XD	Proportional valve
2	CETOP 2/NG04
*	A = Single solenoid C = Double solenoid
**	Type of spool (null position)
01	
03	
N	Flow path control (see symbols table) N = symmetrical
*	Flow rating l/min (Δp 5 bar) P → A/B (Δp 10 bar) P → A/B → T or P → B/A → T 1 = 1 l/min 3 = 3 l/min
*	Max. spool current F = 1.3 A G = 0.65 A
**	Variant: see Tab.1
2	Serial No.

TAB.1 - VARIANTS


No variant (without connectors)	S1(*)
Emergency button	ES
Viton	SV

(*) Coils with Hirschmann connection supplied without connectors. The connectors can be ordered separately, Cap. I • 20.


INPUT SIGNAL CURVES - FLOW RATE

CHARACTERISTIC CURVES Q/I: P → A/B → T OR P → B/A → T


XD2* ** N1* (1 l/min)

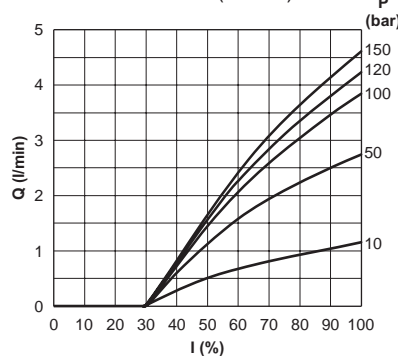

XD2* ** N3* (3 l/min)

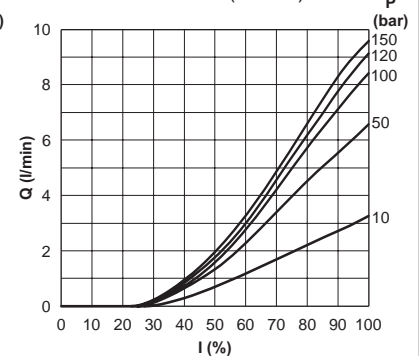


WITH COMPENSATOR AM3H3VP108002

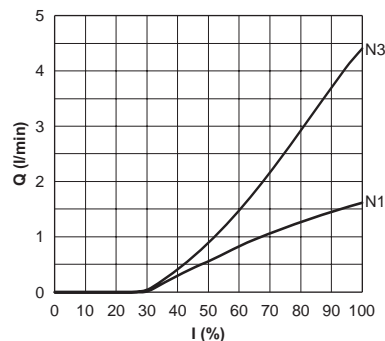


POWER LIMITS TRANSMITTED: P → A/B → T OR P → B/A → T

XD2* ** N1* (1 l/min)

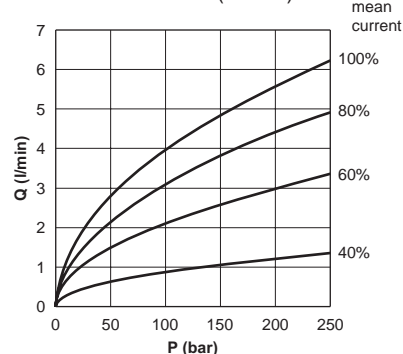

XD2* ** N3* (3 l/min)

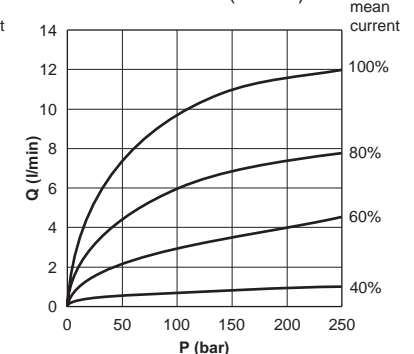

The fluid used was a mineral oil with a viscosity of 46 mm²/s at 40°C. The tests have been carried out at with a fluid of 40°C.

XD2A... / XD2C... SOLENOID OPERATING PROPORTIONAL VALVES CETOP 2

OPERATING SPECIFICATIONS

Max. operating pressure ports P/A/B (1)	250 bar
Max. operating pressure port T - for dynamic pressure see note (2)	250 bar
Nominal flow rate: (Δp 5 bar: P → A/B) (Δp 10 bar: P → A/B → T or P → B/A → T)	1/3 l/min
Maximum regulated flow rate: (Δp 150 bar: P → A/B → T or P → B/A → T)	4.5/9.5 l/min
Flow rate gain	See diagrams
Hysteresis with connection P/A/B/T $\Delta p = 5$ bar (P/A)	$\leq 13\%$ of max. flow rate
Fluid viscosity	$10 \div 500$ mm ² /s
Fluid temperature	$-20^{\circ}\text{C} \div 75^{\circ}\text{C}$
Ambient temperature	$-25^{\circ}\text{C} \div 60^{\circ}\text{C}$
Max. contamination level	class 8 in accordance with NAS 1638 with filter $\beta_{10} \geq 75$
Weight XD.2.A... (single solenoid)	1.0 Kg
Weight XD.2.C... (double solenoid)	1.37 Kg

• Operating specifications are valid for fluid with 46 mm²/s viscosity at 40°C, using the specified electronic control units.

ELECTRONIC CONTROL UNIT

REMSRA** and REMDRA**

Card type control for single and double solenoid. Recommended dither frequency 100 Hz.

CEPS

Electronic amplifier plug version for single solenoid proportional valve (150Hz PWM frequency setting)

(1) **With AM3H compensator:** hysteresis guaranteed up to 150 bar on ports A and B.


Without compensator: use of the valve allowed up to 150 bar.

(2) Dynamic pressure allowed for 500000 cycles.


Supply voltage	12VDC	24VDC
Supply tolerance	+/- 10%	
Supply voltage type	PWM (pulse width modulation)	
Frequency PWM or Dither	100-150 Hz	
Relative duty cycle	Continuous 100% ED	
Max. current	1.3A	0.65A
Solenoid coil resistance at 20°C (68°F)	5.5 Ohm	21.8 Ohm

OVERALL DIMENSIONS

Variant ES: Emergency button.




E: Manual emergency: if necessary, use a tool that does not damage the brass button.

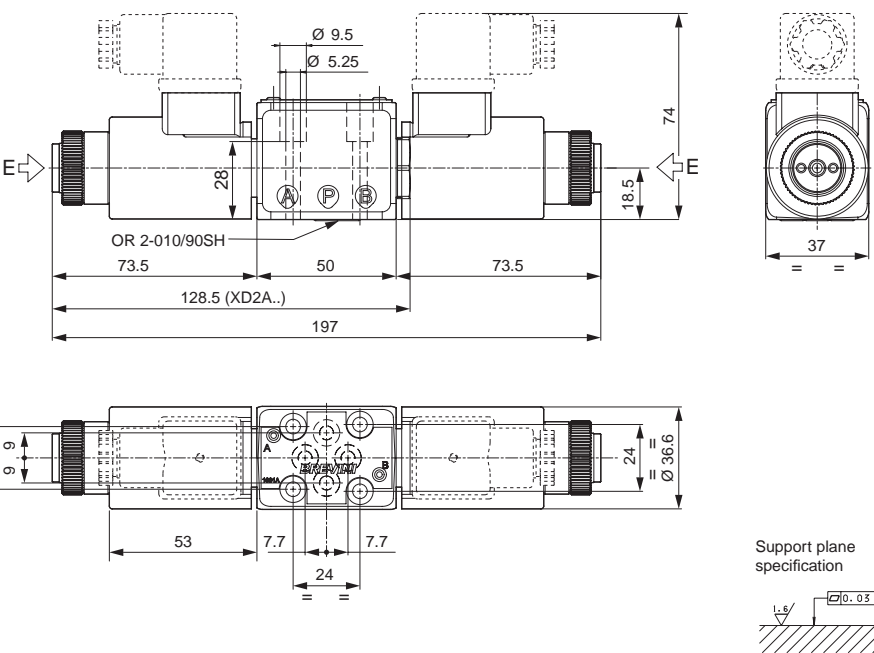


OR 2-010/90SH

Support plane specification



Fixing screws UNI 5931 M5x35 (min. 8.8 material screws are recommended)
Tightening torque 5 Nm / 0.5 Kgm

8



PROPORTIONAL SOLENOID

Type of protection (in relation to connector used)	IP 65
Insulation class wire	H
Weight	0,22 Kg
Surface treatment	FeZn5 UNI ISO 2081