



V*P / V*L...

| | |
|--------------------------|----------------------------|
| V*P... | CAP. II • 7 |
| V*PE... | CAP. II • 8 |
| V*L... | CAP. II • 9 - CAP. II • 10 |
| BSVMP... | CAP. II • 11 |
| KEC16/25... | CAP. II • 9 |
| C*P16/25... | CAP. II • 9 |
| CETOP 3/NG06 | CAP. II • 8 |
| STANDARD SPOOLS FOR AD3E | CAP. II • 10 |
| AD3E... | CAP. II • 11 |
| AM3VM... | CAP. II • 9 |

ORDERING CODE

| | |
|------------|---|
| V | Valve |
| * | M = maximum pressure S = sequence U = exclusion (areas rep. 1, 15 : 1) |
| * | P = Plate mounting L = In line mounting |
| * | E = Presetting for solenoid valve Not for sequencing valve V.S.P... (omit if not required) |
| *** | Size (see overall dimensions) 16 - 25 = NG16 or NG25 161 - 251 = for V*.L... only (in line mounting valve) |
| * | Type of adjustment: M = Plastic knob C = Grub screw |
| * | Setting ranges 1 = 15 ÷ 45 bar (white spring) 2 = 15 ÷ 145 bar (yellow spring) 3 = 45 ÷ 400 bar (green spring) |
| ** | 00 = No variant V1 = Viton AC = Exclusion valve for accumulators (only for VU*, logic element areas rep. 12.5 : 1) AQ = Presetting for XP3 |
| 2 | Serial No. |

V*P PRESSURE CONTROL VALVES PLATE


V*L PRESSURE CONTROL VALVES IN LINE

These pressure control valves are available in the basic VMP* maximum pressure, VSP* sequence and VUP* exclusion versions, with a single pressure value and three calibration ranges that cover the band 15 ÷ 400 bar. It is possible to use auxiliary pilot valves, which can be the simple standard AD3E solenoid valve, by the mere exchange of covers.

These valves have been fitted with an important safety feature for the operation of the system where they are used; a mechanical end of stroke stop prevents the operator from setting pressure values higher than those specified in the catalogue (it is impossible to compress the spring completely). In the standard configuration these valves are supplied with a 1.6 bar main spring and with calibrated ø1 mm pilot feed orifice (Variant part No. 00).

| | | |
|--|---|--------------|
| Pressure max. | 400 bar | |
| Setting ranges | Spring 1 | 15 ÷ 45 bar |
| | Spring 2 | 15 ÷ 145 bar |
| | Spring 3 | 45 ÷ 400 bar |
| Max. flow V*P16... | 150 l/min | |
| Max. flow V*P25... | 350 l/min | |
| Hydraulic fluids | Mineral oils DIN 51524 | |
| Fluid viscosity | 10 ÷ 500 mm ² /s | |
| Fluid temperature | -25°C ÷ 75°C | |
| Ambient temperature | -25°C ÷ 60°C | |
| Max. contamination level | class 10 in accordance with NAS 1638 with filter β ₂₅ ≥ 75 | |
| Drainage V*P16... | 1 ÷ 2 l/min | |
| Drainage V*P25... | 1 ÷ 2.5 l/min | |
| Dynamic pressure at drainage | Max. 2 bar | |
| Weight V*P16... (without pilot valve) | 3,3 Kg | |
| Weight V*P25... (without pilot valve) | 7,4 Kg | |
| Weight V*L16... (without pilot valve) | 4,6 Kg | |
| Weight V*L161... (without pilot valve) | 4,5 Kg | |
| Weight V*L251... (without pilot valve) | 7,7 Kg | |
| Weight V*L25... (without pilot valve) | 8,3 Kg | |

Subplate mounting valves are suitable for covers which do not conform to DIN standards type C*P16/25.. whilst in line mounting valves are suitable for DIN standards covers type KEC16/25...

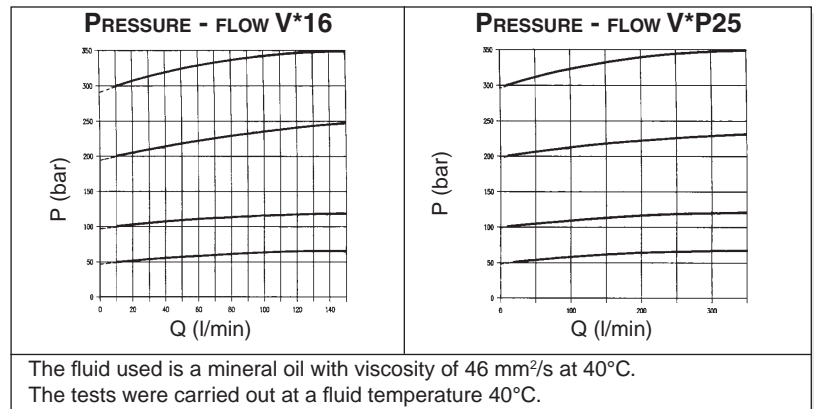


HYDRAULIC SYMBOLS


| | | | |
|---|--|--|--|
| VMP16**... VMP25**... Maximum pressure valve Internal piloting and draining | | | |
| VSP16**... VSP25**... Sequencing valve Internal piloting External draining | | | |
| VUP16**... VUP25**... Exclusion valve External piloting Internal draining | | | |

V*P... PRESSURE CONTROL VALVES PLATE

OVERALL DIMENSIONS V*P16...

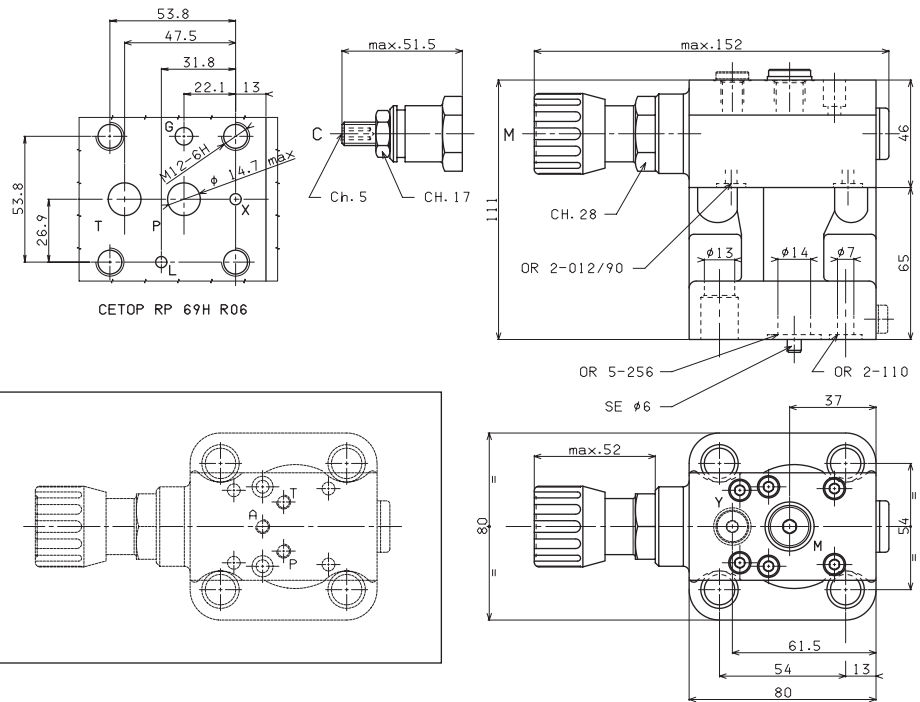


VERSION WITH
PRESETTING FOR
SOLENOID VALVE

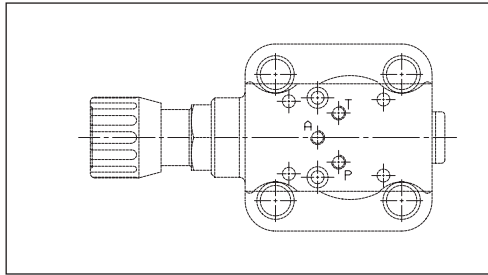

Fixing screws UNI 5931 M12x40 with material specifications min. 8.8
Tightening torque 70 Nm / 7 Kg


M = 1/4" BSP connector for pressure gauge for maximum pressure valve version only
Y = 1/8" BSP external draining for sequencing valve version only

Support plane
specifications




2

OVERALL DIMENSIONS V*P25...

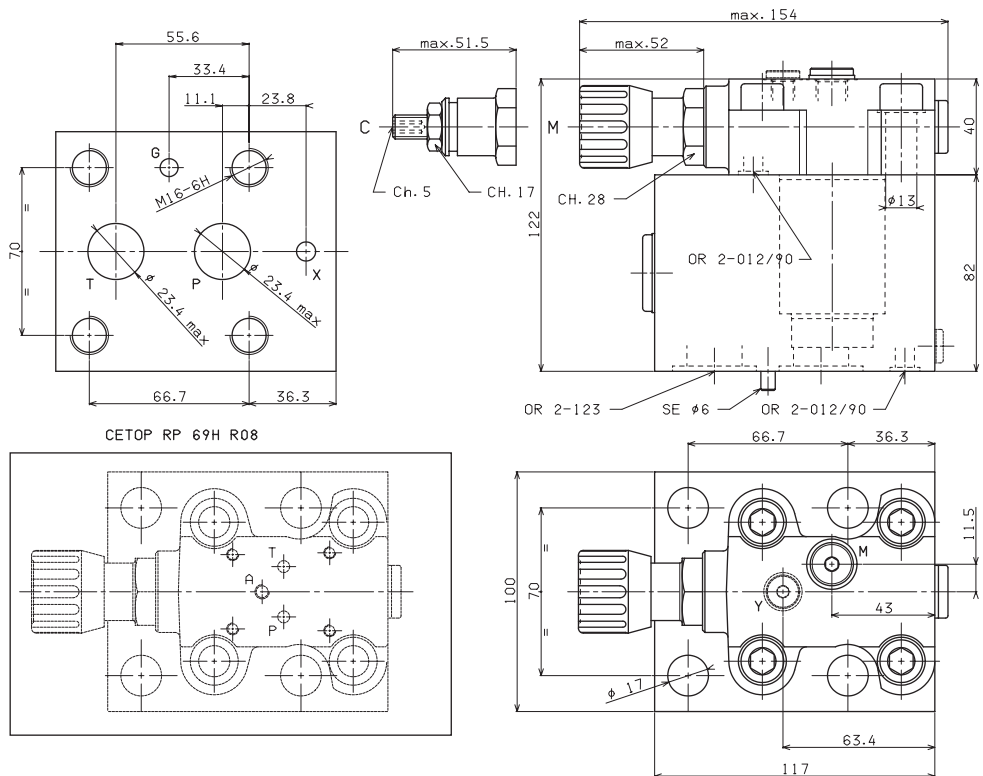

VERSION WITH
PRESETTING FOR
SOLENOID VALVE

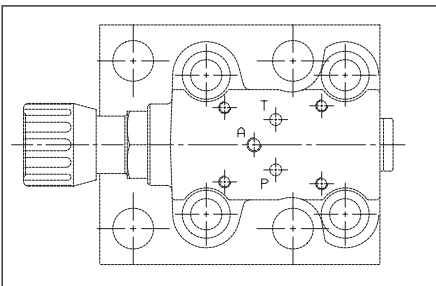

Fixing screws UNI 5931 M16x100 with material specifications min. 8.8
Tightening torque 70 Nm / 7 Kg

M = 1/4" BSP connector for pressure gauge for maximum pressure valve version only
Y = 1/8" BSP external draining for sequencing valve version only

Support plane
specifications

